

::: FTDS Fiber Distribution Frame :::



FTDS Fiber Management System are designed for terminating optical fiber in exchanges or communications room where higher density is required.

FTDS features a modular system for splicing and patching with flexible cable management systems. All cable are front accessible with individual slide out splice/patch module for easy fiber maintenance. A 46U FTDS cable management frame is able to accomodate more that 1000 splices and patch cables and is a cost effective solution for optic fiber management.

::: Features :::

- High density - up to 1440 fiber per rack
- Cost effective
- Flexibility on connector type SC, FC, E-2000, LC
- Easy installation and maintenance



::: Ordering Information :::

Part Number	Description
LTOC-FTDS-CAR-6030	FTDS Fiber Management Cabinet
LTOC-FTDS-CAB-9030	FTDS Fiber Management Cabinet c/w Cable Management Route

::: FTDS Fiber Management System :::




FTDS Fiber Management System are designed for terminating optical fiber in exchanges or communications room where higher density is required.

FTDS features a modular system for splicing and patching with flexible cable management systems. All cable are front accessible with individual slide out splice/patch module for easy fiber maintenance. A 46U FTDS is able to accomodate up to 1000 splices and patch cables and is a cost effective solution for optic fiber management.



::: FTDS - Subrack :::

- 3U height FTDS Subrack
- The standards subrack is 19" rack mount type
- The standards subrack shall be able to accomodate up to 12 splice and patch modules (Total of 144 fibre)
- Dust cover is available for each subrack (optional)

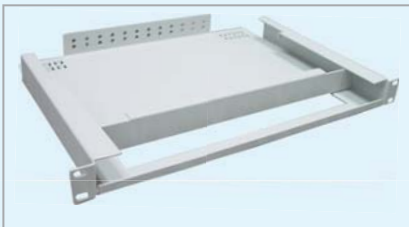

::: Slack Cable Drawer :::

- To store excess cable loose tube
- Slide-out designed for easy access



::: Fiber Management Guide :::

- To ensure minimum optical fiber bending radius
- To allow patchcord exit to both direction



::: Splice / Patch Module :::

- Accomodate up to 12 connector per module - FC/PC, E2000/APC or SC/PC
- The module includes splice holder that holds up 12 splice sleeves
- Strength relief facilities for fiber loose tube

::: Ordering Information :::

Part Number	Description
LTOC-FTDS-SR-3U	FTDS 19" Subrack 3U
LTOC-FTDS-SCD	FTDS Slack Cable Drawer
LTOC-FTDS-FMG	FTDS Fiber Management Guide
LTOC-FTDS-SPM-XX	FTDS Splice/Patch Module