


Fire-retardant or Flame-resistance Cable

Cross Section Drawing:

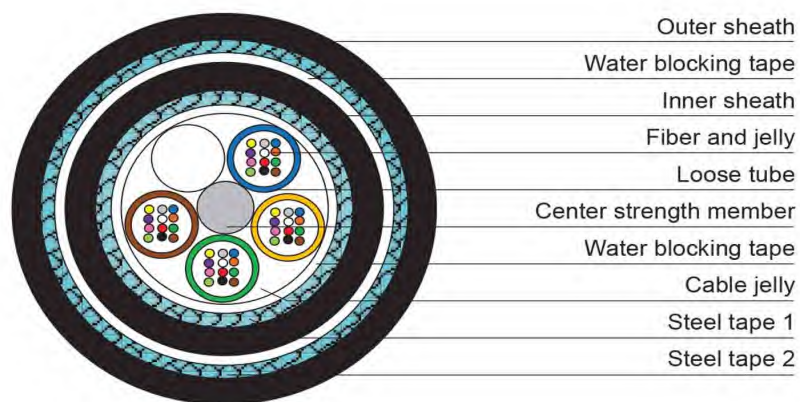

Characteristic and Application:

- Up to 312 fibers
- Good water penetration, mechanical and environmental performance
- Retardant PE or LSZH sheath materials
- Mica tape is optional
- In accordance with the standard IEC 60331 or IEC 60332



Typical Parameters:

Flame-resistance cable

Cable type	Fiber count	Nominal diameter (mm)	Nominal weight (kg/km)	Nominal pulling force (N)	Nominal crush resistance (N/10cm)
OFC-24-FD-LSZH	24	10.1	105	1000	1000
OFC-24-SD-LSZH	24	10.1	100	1500	1000

Fire-retardant cable

Cable type	Fiber count	Nominal diameter (mm)	Nominal weight (kg/km)	Nominal pulling force (N)	Nominal crush resistance (N/10cm)
OFC-24-SSStD-LSZH	24	13.9	215	2000	4000