


RevNo	Revision note	Date
△		
△		
△		

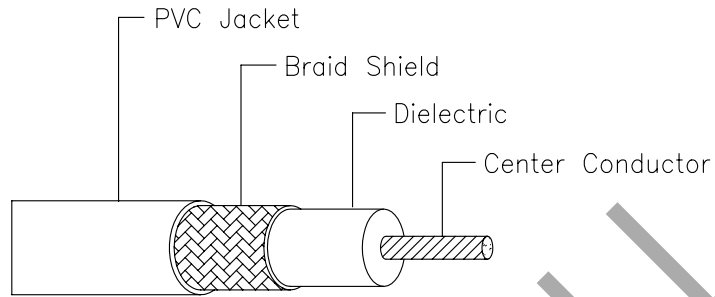

ELECTRICAL PROPERTIES :

Impedance : 75.0 ±3.0 Ohms

Velocity of propagation : 78.0% Nominal

Capacitance Conductor to Shield : 17.3 pF/ft (56.8 pF/m) Nominal

ATTENUATION : @ 68 °F (20 °C)

@ Frequency MHz	dB/100 ft. (MAX.)	dB/100 meters (MAX.)
1 MHz	0.3 dB	1.0 dB
10 MHz	0.8 dB	2.6 dB
50 MHz	1.8 dB	5.9 dB
100 MHz	2.7 dB	8.9 dB
200 MHz	4.5 dB	14.8 dB
400 MHz	6.6 dB	21.7 dB
700 MHz	8.9 dB	29.2 dB
900 MHz	10.1 dB	33.1 dB
1000 MHz	10.9 dB	35.8 dB

CONSTRUCTION DETAILS

CENTER CONDUCTOR :

22AWG (19/0.16 mm) Stranded Bare Copper Wire
Nominal Diameter 0.032" (0.81 mm)

DIELECTRIC :

Gas Expanded Polyethylene
Nominal Diameter Over Dielectric : 0.146" (3.71 mm)


SHIELD :

Braid Shield 95% Coverage

JACKET :

Flexible Flame Retardant PVC Jacket
Nominal Diameter Over Jacket : 0.242" (6.15 mm)
Nominal Jacket Thickness : 0.038" (0.97 mm)

LISTING AND RATINGS : UL E131077 AWM 1354

Designed by - date	Checked by - date	Approved by - date	Date 20/08/2009	Size A4	Scale -
 HOSIWELL TECHNOLOGY CO., LTD.			Part Name CCTV Coaxial Cable	Unit -	
			Part No. F-RG-59/US	Issued 1	
			Ref. No.	Sheet 1 of 1	
			Used On.		