


FC Adapter

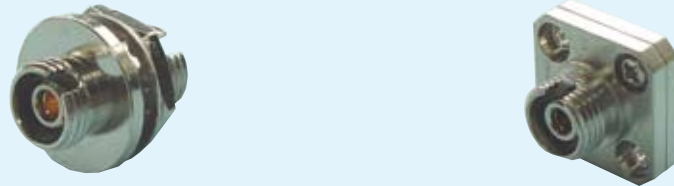

Features

- Nickel Plated Brass Housing
- Meets JIS C5970 Specifications
- For PC, Ultra PC, APC, and PM fiber applications
- All zirconia sleeves are 100% stressed and proof tested
- Included panel nut, washer, and dustcap
- APC available with identifier washer (special order)

Specification

Item	Description
Insertion Loss	< 0.3 dB
Exchangeability	< 0.2 dB
Repeatability	< 0.2 dB
Operational Temperature	- 40°C ~ + 70°C
Storage Temperature	- 40°C ~ + 70°C

Ordering Information

Part Number	Description
LTOC-ADP-FC-SX-BD	Fiber Adapter FC D Flange - Bronze
LTOC-ADP-FC-SX-CD	Fiber Adapter FC D Flange - Ceramic
LTOC-ADP-FC-SX-CS	Fiber Adapter FC Square - Ceramic
LTOC-ADP-FC-SX-BS	Fiber Adapter FC Square Flange - Bronze