


::: Face Plate :::

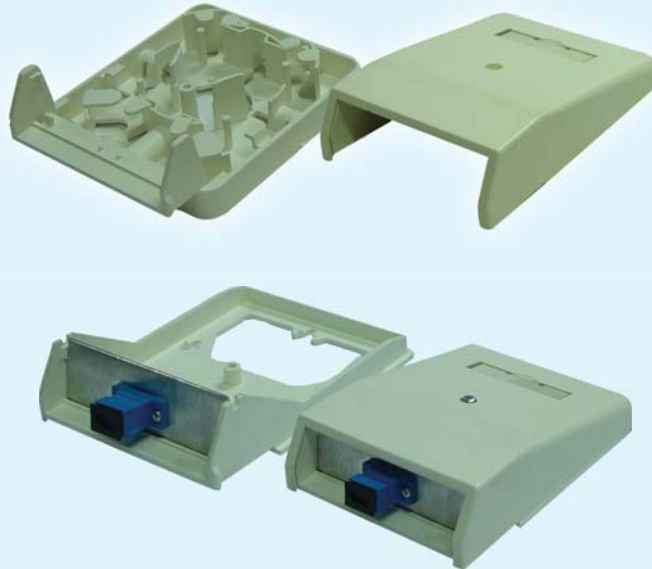

::: Features :::

- Terminate up to 4 fiber
- Snap of adapter plate for different fiber adapter : SC, FC, LC, E-2000 & etc
- Angled outlet to avoid sharp bending of patchcord
- Perfect for FTTH pre-terminate or field terminate cable
- Comply to 30mm minimum bend radius requirement

::: Specification :::

Dimension	85mm x 110mm
Material	Fire resistant UL94-V0 rated Polystyrene
Operating temperature	-20oC to + 50oC (5 to 95% RH)