


120 OHM CABLE

::: 4 Pair FTP 120 Ohm Cable :::

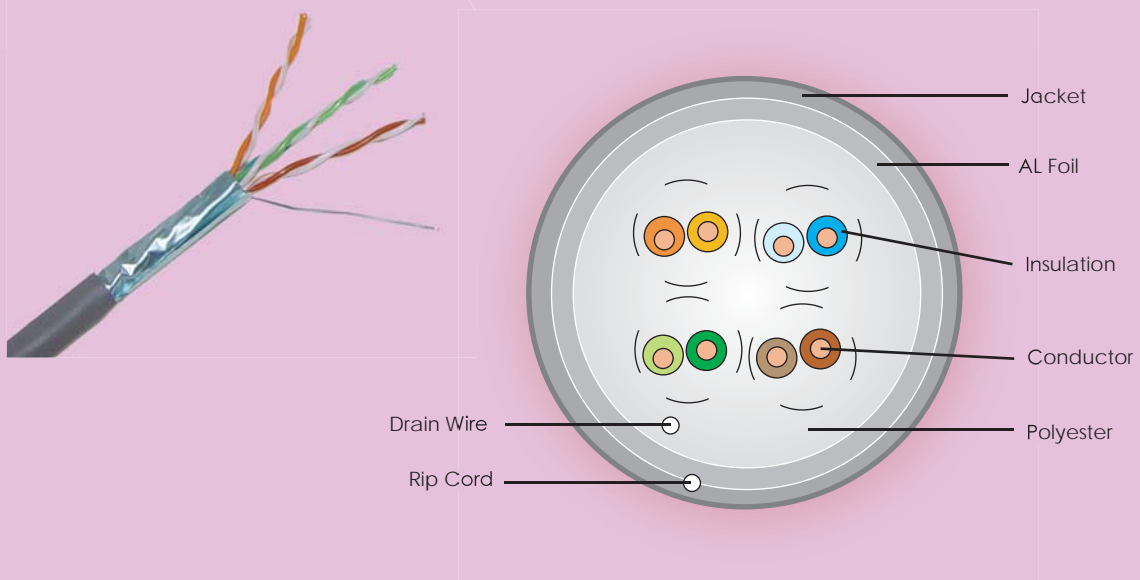

1. Conductor	Material	Tinned Copper
	Size	24 AWG
	Construction	1/0.50 ± 0.01
2. Insulation	Material	PE
	Thickness	MIN at any point : 0.15mm MAX AVG : 0.22mm
	Diameter	0.95 ± 0.02
	Colors	Blue/White-Blue Orange-White-Orange Green/White-Green Brown/White-Brown
	Elongation	MIN 300%
	Tensile Strength	MIN 1.682Kg/mm ²
	3. Stranding	Polyester
AL Foil		0.035 x 18mm
Drain Wire		1/0.50mm (Tinning Wire)
4. Jacket	Material	PVC
	Thickness	MIN at any point : 0.40mm MAX AVG : 0.55mm
	Diameter	5.8 ± 0.3
	Colors	Assorted upon request
	Marking	Assorted upon request
5. Flame Test	Burning five times, every time is less than 60 per cent and paper flag can't be burned	

::: Ordering Information :::

Part Number	Description
LTSS-FT-120-04	4 Pair FTP 120 Ohm Cable