


## 120 OHM CABLE

### ::: 8 Pair FTP 120 Ohm Cable :::

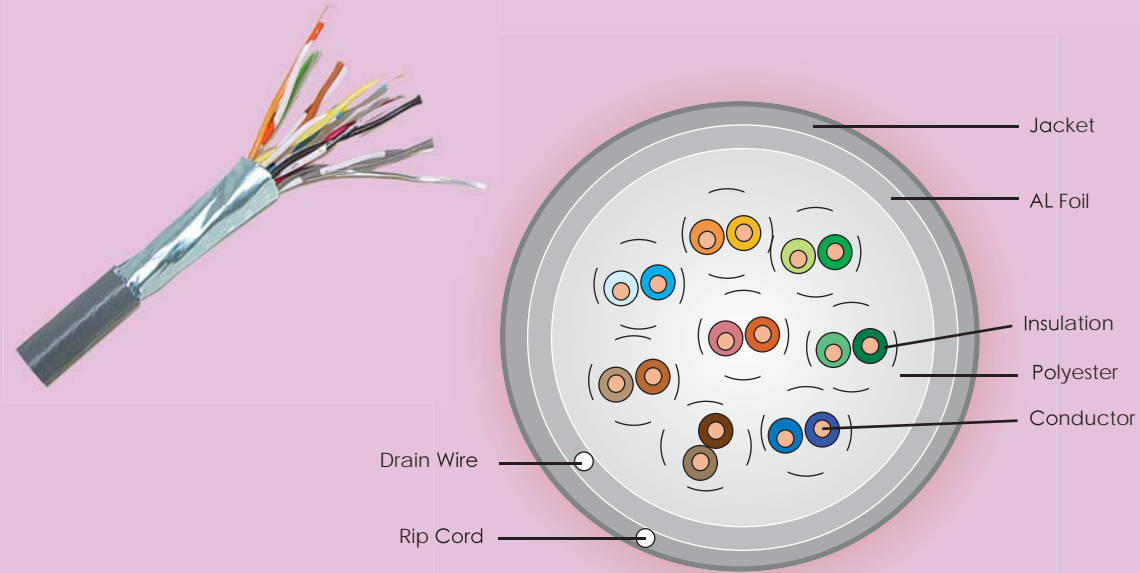

1. Conductor	Material	Tinned Copper
	Size	24 AWG
	Construction	1/0.505 ± 0.01
2. Insulation	Material	PE
	Thickness	MIN at any point : 0.15mm MAX AVG : 0.22mm
	Diameter	0.95 ± 0.02
	Colors	Blue/White-Blue
		Orange-White-Orange
		Green/White-Green
		Brown/White-Brown
		Blue/Red-Blue
3. Stranding	Polyester	0.025 x 25mm
	AL Foil	0.035 x 25mm
	Drain Wire	1/0.50mm (Tinning Wire)
	4. Jacket	Material
4. Jacket	Thickness	MIN at any point : 0.40mm MAX AVG : 0.62mm
	Diameter	6.5 ± 0.3
	Colors	Assorted upon request
	Marking	Assorted upon request
	5. Flame Test	Burning five times, every time is less than 60 per cent and paper flag can't be burned

### ::: Ordering Information :::

Part Number	Description
LTSS-FT-120-08	8 Pair FTP 120 Ohm Cable