


120 OHM CABLE

::: 16 Pair FTP 120 Ohm Cable :::

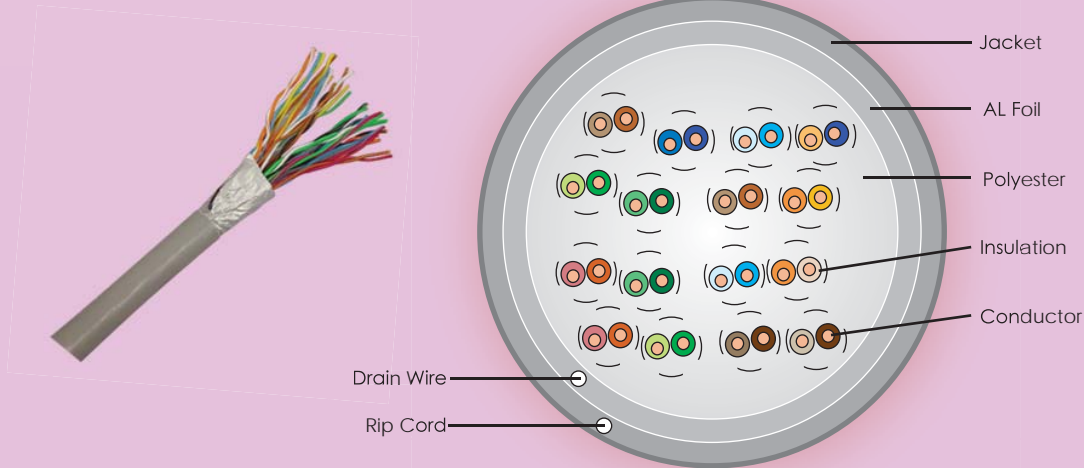

1. Conductor	Material	Tinned Copper
	Size	24 AWG
	Construction	1/0.505 ± 0.01
2. Insulation	Material	PE
	Thickness	MIN at any point : 0.15mm MAX AVG : 0.22mm
	Diameter	0.95 ± 0.02
	Colors	Blue/White-Blue
		Orange-White-Orange
		Green/White-Green
		Brown/White-Brown
		Blue/Red-Blue
		Orange/Red-Orange
		Green/Red-Green
		Brown/Red-Brown
		Blue/Black-Blue
		Orange/Black-Orange
	Green/Black-Green	
	Brown/Black-Brown	
	Blue/Yellow-Blue	
	Orange/Yellow-Orange	
	Green/Yellow-Green	
	Brown/Yellow-Brown	
3. Stranding	Polyester	0.025 x 32mm
	AL Foil	0.035 x 32mm
	Drain Wire	1/0.50mm (Tinning Wire)
4. Jacket	Material	PVC
	Thickness	MIN at any point : 0.40mm MAX AVG : 0.80mm
	Diameter	10.5 ± 0.3
	Colors	Dark Grey
	Marking	Litech-16 Pair VF Cable 120 Ohm
5. Flame Test	Burning five times, every time is less than 60 per cent and paper flag can't be burned	

::: Ordering Information :::

Part Number	Description
LTSS-FT-120-16	16 Pair FTP 120 Ohm Cable