


120 OHMS HIGH DENSITY DDF ACCESSORIES

::: Insertion Tool :::

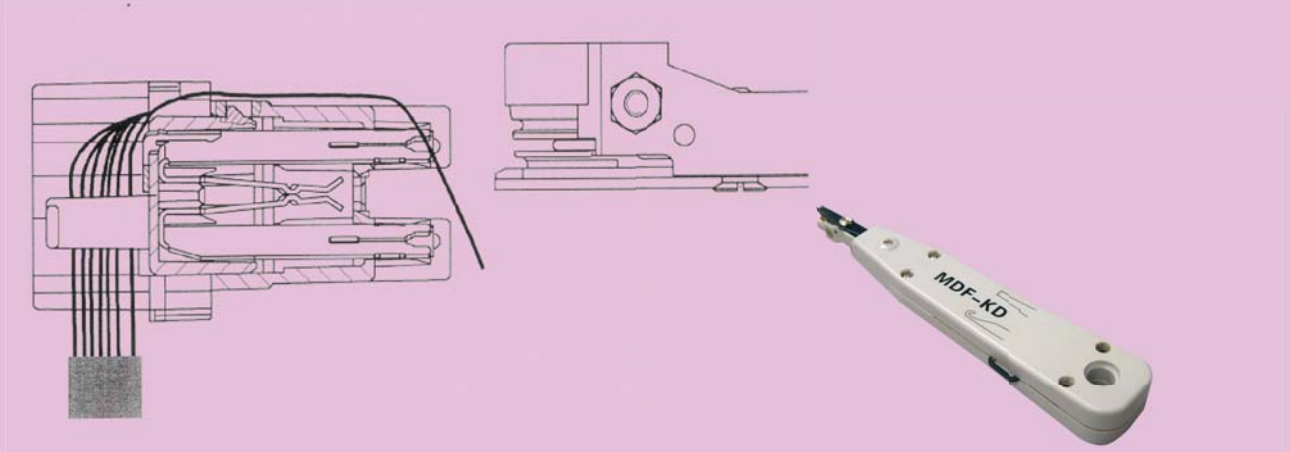

The wires are positioned in the cable grips with an overlength of approximately 100 mm and then terminated by using the insertion tool.

The insertion tool is fitted with a scissors mechanism that automatically cuts off the overlength.

If the cable needs to be reterminated in the same position then a 5 mm length (the initial termination point) should be cut off from the wire.

::: Test cord :::



- With one HDF plug and banana plugs/crocodile clip/RJ11 plug
- For one-sided access to a signal in High Density DDF module and another side to tester interface

::: Ordering Information :::

Part Number	Description
LTZF-DDF-TL	High Density DDF Insertion Tool
LTZF-DDF-TES-BP02	HDF test cord with banana plug - 3 mtr
LTZF-DDF-TES-CL02	HDF test cord with crocodile clip - 3 mtr
LTZF-DDF-TES-RJ02	HDF test cord with RJ11 plug - 3 mtr